
इस्पात काउंटरसंक शीर्ष तार
कीले — विशिष्टि

(दूसरा पुनरीक्षण)

Steel Countersunk Head Wire
Nails — Specification

(Second Revision)

ICS 21.060.50

© BIS 2023



भारतीय मानक ब्यूरो
BUREAU OF INDIAN STANDARDS
मानक भवन, 9 बहादुर शाह ज़फर मार्ग, नई दिल्ली - 110002
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI - 110002

www.bis.gov.in www.standardsbis.in

October 2023

Price Group 6

FOREWORD

This Indian Standard (Second Revision) was adopted by the Bureau of Indian Standards after the draft finalized by the General Engineering and Fasteners Standards Sectional Committee had been approved by the Production and General Engineering Division Council.

This standard was first published in 1961 and subsequently revised in 1972 with further amendments in 1975, 1979 and 1981. In this revision, all the previous amendments have been incorporated and some editorial changes have been made.

The other types of nails are being covered by separate standards, as follows:

- IS 6730 : 1972 Felt nails
- IS 6732 : 1972 Double point nails
- IS 6733 : 1972 Wall and roofing nails
- IS 6734 : 1972 Cut lath and lath nails
- IS 6738 : 1972 Panel pins and lost head nails

The composition of the Committee responsible for the formulation of this standard is given in Annex A.

For the purpose of deciding whether a particular requirement of this standard is complied with the final value, observed or calculated expressing the result of a test or analysis shall be rounded off in accordance with IS 2 : 2022 'Rules for rounding off numerical values (*second revision*)'. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

*Indian Standard***STEEL COUNTERSUNK HEAD WIRE NAILS — SPECIFICATION***(Second Revision)***1 SCOPE**

This standard gives the requirements of steel countersunk head wire nails.

2 REFERENCES

The standard given below contain provisions which, through reference in this text, constitute provisions of this standard. At the time of publication, the edition indicated was valid. The standard is subject to revision, and parties to agreements based on this standard are encouraged to investigate the possibility of applying the most recent edition of these standard:

<i>IS No.</i>	<i>Title</i>
IS 280 : 2006	Mild steel wire for general engineering purposes (<i>fourth revision</i>)

3 MATERIAL

Nails shall be manufactured from mild steel wire conforming to IS 280 having a minimum ultimate tensile strength of 550 MPa and satisfying bend test as in 7.

4 DIMENSIONS AND TOLERANCES

4.1 The dimensions and tolerances of the countersunk head type wire nails shall be according to Table 1 to Table 4.

4.2 The bend of shank as shown in Fig. 1 shall not exceed 1.0 percent of total length.

4.3 Eccentricity and ovality of the centre of the nail head from axis of shank shall be as below:

- For nails with shank diameter ≥ 2.00 mm; 12 percent of shank diameter, *Max.*
- For nails with shank diameter < 2.00 mm; 14 percent of shank diameter, *Max.*

5 GENERAL REQUIREMENTS

The nails shall be machine made and may have die marks and feeding knife marks on the shank. They shall be uniformly circular in section, straight, free

from wasters and the ends shall be pointed to conform to the dimensions given in Table 1 to Table 4. The heads shall be properly formed, chequered end concentric with the shank.

6 FINISH

Unless otherwise specified by the purchaser, countersunk head wire nails shall be supplied bright finished.

7 BEND TEST

Steel countersunk head wire nails, selected according to **10.2**, when cold shall not break or develop cracks, when doubled over either by pressure or by blow from a hammer until the internal radius is equal to the diameter of the test piece and the sides are parallel.

8 DESIGNATION

The countersunk head nails shall be designated by the size, length and the number of this standard.

Example:

A countersunk head nail of size 4.00 mm and length 100 mm shall be designated as:

Nail 4 × 100 IS 723

9 PACKING

Nails of different sizes and types shall be packed in separate containers.

9.1 Nails including 25 mm in length and below shall be packed in cardboard boxes and the net weight of each box shall be 0.5 kg. The nails may also be supplied in gunny bags and the net weight of each bag shall be 50 kg.

9.2 Nails above 25 mm and below 80 mm in length shall be packed in cardboard boxes and the net weight of each box shall be 2.5 kg. The nails may also be supplied in gunny bags, and the net weight of each bag shall be 50 kg.

9.3 Nails 80 mm and above in length shall be packed in wrappings of double gunny bags, the weight of each package being 15 kg. The nails may also be supplied in cases of bituminized canvas or hessian bags; the net weight of each package shall be 50 kg.

10 SCALE OF SAMPLING AND CRITERIA FOR CONFORMITY

10.1 Lot

In any consignment all the packages of nails of the same type and size manufactured under essentially similar conditions shall be grouped together to constitute a lot.

10.2 Selection of Samples

The number of nails to be selected at random from the lot shall depend on the size of the lot and shall be in accordance with col (1) and (2) of Table 5. The nails shall be selected from at least 25 percent of the packages.

10.3 Number of Tests and Criteria for Conformity for Visual End Dimensional Characteristics

All the nails selected as in **10.2** shall be examined for manufacturing defects, dimensions and finish. The lot shall be considered as conforming to these requirements if the number of nails found defective does not exceed the corresponding acceptance number given in col (3) to of Table 5.

10.4 Number of Tests and Criteria for Conformity For Bend Test

The number of nails to be selected for carrying out bend test shall be according to col (4) of Table 5. These nails shall be selected from those already inspected according to **10.3** and found satisfactory. The lot shall be considered as conforming to the requirements of bend test if the number of nails failing to pass this test does not exceed the corresponding acceptance number in col (5) of Table 5.

10.5 The lot shall be considered as conforming to the requirements of the specification if it satisfies **10.3** and **10.4**.

11 MARKING

11.1 All packages of nails shall be marked with the following information:


- a) Manufacturer's name or trade-mark;
- b) Type of nail;
- c) Size (shank diameter) and length of nail; and
- d) Net weight of the package.

11.2 BIS Certification Marking

The product(s) conforming to the requirements of this standard may be certified as per the conformity assessment schemes under the provisions of the *Bureau of Indian Standards Act, 2016* and the Rules and Regulations frames thereunder, and the product(s) may be marked with the Standard Mark.

Table 1 Dimensions and Tolerances of Steel Countersunk Head Wire Nails (Size 1.25 mm to 1.40 mm)

(Clauses 4.1 and 5)
All dimensions in millimetres.

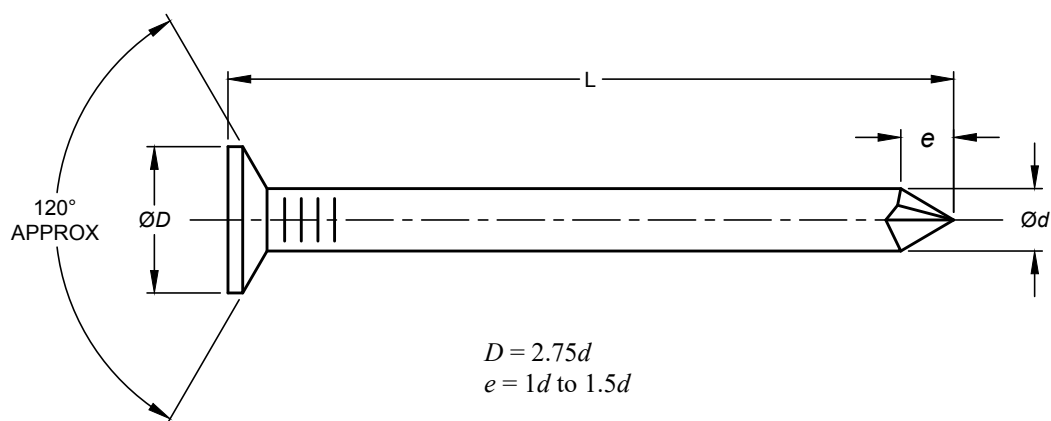


Sl No.	Size d (Shank Diameter)		Head Diameter D		Length L		Approximate Number of Nails/kg
	Basic	Tolerance	Basic	Tolerance	Basic	Tolerance	
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
i)	1.25	± 0.04	3.4	± 0.17	20	± 1.0	5 060
ii)	1.40	± 0.04	3.8	± 0.17	20	± 1.0	3 040

NOTE — The number of nails per kilogram is likely to vary to a considerable extent. The figure given in the table is intended only for guidance to the purchaser.

Table 2 Dimensions and Tolerances of Steel Countersunk Head Wire Nails (Size 1.60 mm to 1.80 mm)

(Clauses 4.1 and 5)

All dimensions in millimetres.

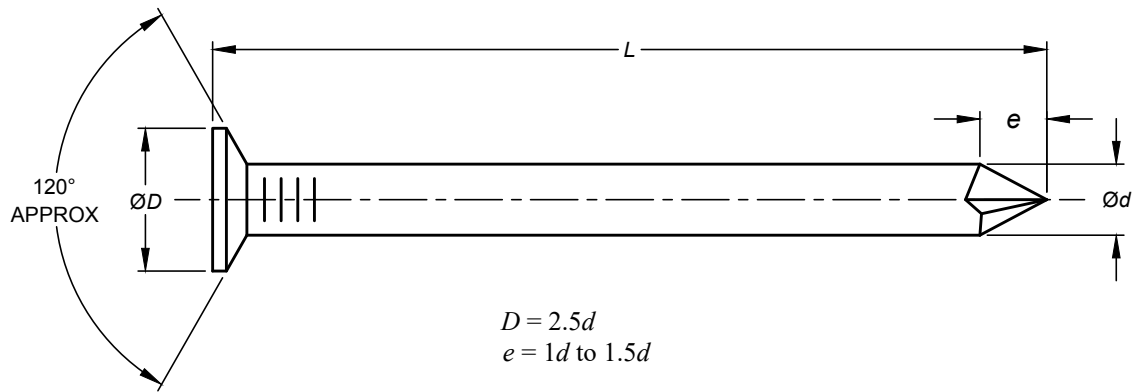

SI No.	Size d (Shank Diameter)		Head Diameter D		Length L		Approximate Number of Nails/kg
	Basic	Tolerance	Basic	Tolerance	Basic	Tolerance	
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
i)	1.60	± 0.04	4.0	± 0.2	15	± 1.0	3 940
					20	± 1.0	2 710
					25	± 1.2	2 110
ii)	1.80	± 0.04	4.5	± 0.23	25	± 1.2	1 720
					30	± 1.2	1 410

NOTE — The number off nails per kilogram is likely to vary to a considerable extent. The figure given in the table is intended only for guidance to the purchaser.


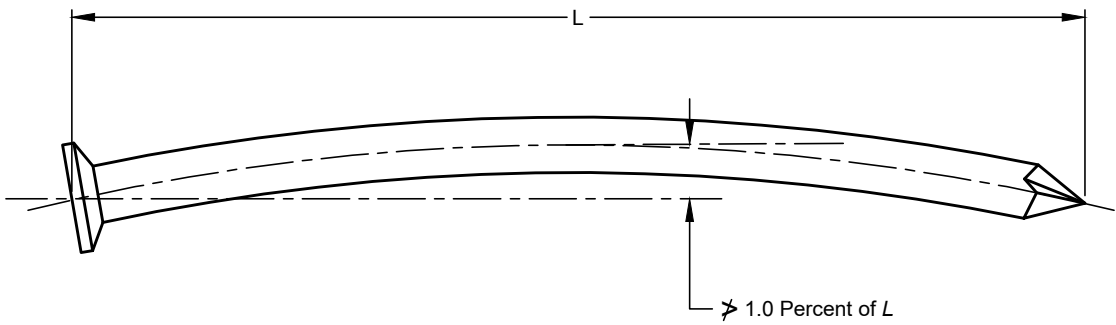


FIG. 1 BEND OF SHANK

Table 3 Dimensions and Tolerances for Steel Countersunk Head Wire Nails (Size 2.00 mm to 2.80 mm)

(Clauses 4.1 and 5)

All dimensions in millimetres.

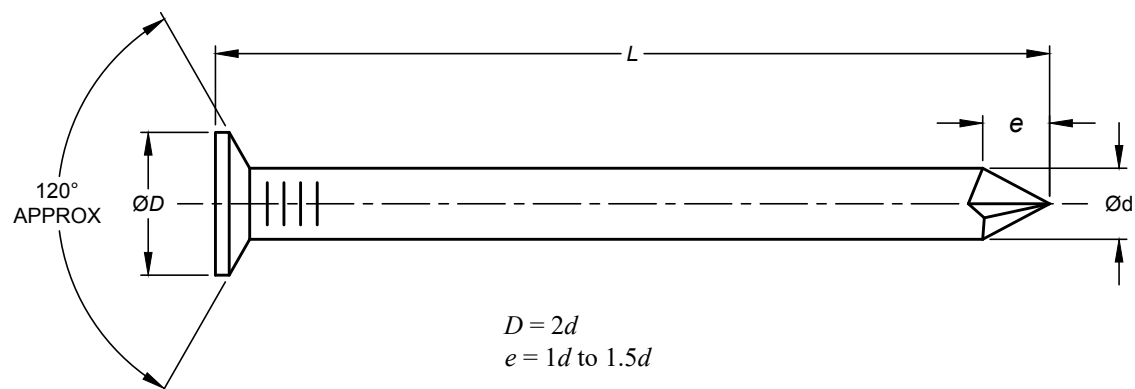


Sl No.	Size d (Shank Diameter)		Head Diameter D		Length L		Approximate Number of Nails/kg
	Basic	Tolerance	Basic	Tolerance	Basic	Tolerance	
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
i)	2.00	± 0.04	4.00	± 0.2	25	± 1.2	1 470
					30	± 1.2	1 170
					40	± 1.5	840
					50	± 2.1	650
ii)	2.24	± 0.04	4.5	± 0.23	40	± 1.5	700
iii)	2.50	± 0.05	5.0	± 0.25	50	± 2.1	550
iv)	2.80	± 0.06	5.6	± 0.28	60	± 2.1	350

NOTE — The number of nails per kilogram is likely to vary to a considerable extent. The figure given in the table is intended only for guidance to the purchaser.

Table 4 Dimensions and Tolerances for Steel Countersunk Head Wire Nails (Size 3.15 mm to 10 mm)

(Clauses 4.1 and 5)

All dimensions in millimetres.

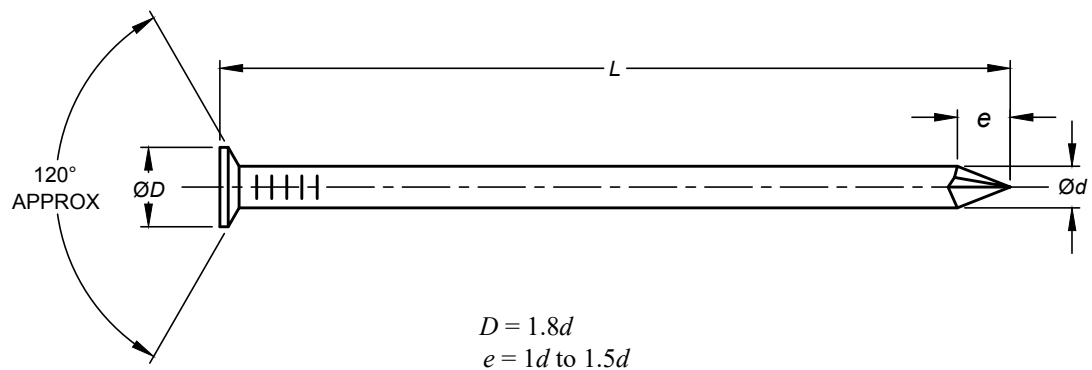

Sl No.	Size d (Shank Diameter)		Head Diameter D		Length L		Approximate Number of Nails/kg
	Basic	Tolerance	Basic	Tolerance	Basic	Tolerance	
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
i)	3.15	± 0.06	5.7	± 0.29	60	± 2.1	230
ii)	3.55	± 0.06	6.4	± 0.32	80	± 2.6	140
iii)	4.00	± 0.06	7.2	± 0.36	100	± 3.4	90
iv)	4.50	± 0.06	8.1	± 0.41	90	± 3.1	90
					100	± 3.4	80
					125	± 3.8	65
v)	5.00	± 0.06	9.0	± 0.45	100	± 3.4	60
					125	± 3.8	50
					150	± 3.8	40
vi)	6.30	± 0.06	11.3	± 0.57	150	± 3.8	30
vii)	8.00	± 0.06	14.4	± 0.72	200	± 4.4	12
					225	± 4.4	10
vii)	10.00	± 0.06	18.0	± 0.90	250	± 4.4	7

NOTE — The number of nails per kilogram likely to vary to a considerable extent. The figure given in the table is intended only for guidance to the purchaser.

Table 5 Scale of Sampling and Criteria for Conformity*(Clauses 10.2, 10.3 and 10.4)*

Sl No.	Approximate Number of Nails in the Lot	For Visual and Dimensional Characteristic		For Bend Test	
		Number of Nails to be Selected	Permissible Number of Defective Nails	Sub-Sample Size	Permissible Number of Defective Nails
(1)	(2)	(3)	(4)	(5)	(6)
i)	Up to 1 000	32	5	8	0
ii)	1 001 to 3 000	50	7	13	0
iii)	3 001 to 10 000	80	10	20	0
iv)	10 001 to 35 000	125	14	32	1
v)	35 001 and above	200	21	50	2

NOTE — The sampling plan accepts the lots containing 7 percent or less defectives in respect of visual and dimensional characteristics more than 95 percent of the times. In the case of bend test the lot containing 1.5 percent or less defectives will be accepted more than 95 percent of times.

ANNEX A

(Foreword)

COMMITTEE COMPOSITION

General Engineering and Fasteners Standards Sectional Committee, PGD 37

<i>Organization</i>	<i>Representative(s)</i>
In Personal Capacity (9, Shantha Sadana, 4th Cross, F - Block, 1st Stage, J. P. Nagar, Mysuru - 570031)	SHRI N. SRINIVASA MURTHY (Chairperson)
ASP Private Limited, Howrah	SHRI VINOD SHARMA SHRI B. BHAUMIK (<i>Alternate</i>)
Bosch Ltd, Bengaluru	SHRI KUMARASWAMY S.
Bharat Dynamics Ltd, Hyderabad	SHRI P. SRINIVASA RAO SHRI K. VISHWERSHWAR RAO (<i>Alternate</i>)
Bharat Earth Movers Ltd, Bengaluru	SHRI K. C. RAJU SHRI M. R. SENTHIL KUMAR (<i>Alternate I</i>) SHRI C. HANUMESH (<i>Alternate II</i>)
Bharat Heavy Electricals Ltd (BHEL), Hyderabad	SHRI AVINASH S. JOHN KUJUR SHRI SRI KALYAN A. (<i>Alternate I</i>) SHRI LALIT KUMAR (<i>Alternate II</i>)
Central Manufacturing Technology Institute, Bengaluru	SHRI ANIL KUMAR SHRI S. K. VERMA (<i>Alternate</i>)
CQA (GS), DGQA, Ministry of Defence, Kanpur	SHRI R. K. S. DECCA SHRI S. L. MEENA (<i>Alternate</i>)
Deepak Fasteners, Ludhiana	SHRI SANJEEV KARLA SHRI DEEPAK KALRA (<i>Alternate I</i>) SHRI SUKHJEEVAN SINGH NOKEWAL (<i>Alternate II</i>)
Hilti India Pvt Ltd, Mumbai	SHRI PRASHANTH SATHE SHRI SHOUNAK MITRA (<i>Alternate</i>)
HMT Ltd, Bengaluru	SHRI C. S. VIJAYA PRAKASH SHRI SOMASUNDARAM (<i>Alternate I</i>) SHRI KULDEEP VERMA (<i>Alternate II</i>)
Hindustan Fasteners, Nasik	SHRI INDRAPAL
Indian Institute of Technology, Mumbai	DR PANKAJ KUMAR
India Meteorology Department (IMD), Pune	SHRI S. KRISHNAIAH SHRI P. N. MOHANAN (<i>Alternate</i>)
Leo Fasteners, Pondicherry	SHRI AMIT SHAH
M K Fasteners, Bengaluru	SHRI KUNTHALAL AMEN

<i>Organization</i>	<i>Representative(s)</i>
National Aerospace Laboratories, Bengaluru	SHRI S. RAVISHANKAR SHRI M. S. KAMLESHAIAH (<i>Alternate</i>)
National Physical Laboratory, New Delhi	SHRI GAUTAM MANDAL DR NIDHI SINGH (<i>Alternate</i>)
National Test House, Kolkata	SHRI S. P. ROY SHRI ANIL CHOPRA (<i>Alternate</i>)
Precise Fasteners Pvt Ltd, Mumbai	SHRI PARAG PRAKASH SHAH
Research Design & Standards Organization (RDSO), Lucknow	SHRI R. N. TRIPATHI
Right Tight Fasteners Pvt Ltd, Nasik	SHRI BALVEER SHRI AMARJEET SINGH CHHABRA (<i>Alternate</i>)
Size Control Gauges & Tools Pvt Ltd, Pune	SHRI A. S. DURVE SHRI ATUL ASHOK DURVE (<i>Alternate</i>)
Springlock Engineering Industries, Vadodara	SHRI SAMIR C. BHALAWAT
Sundaram Fasteners Ltd, Chennai	SHRI ATUL KUMAR AGRAWAL
Tata Motors Ltd, Pune	SHRI SAGAR TALOLE SHRI R. R. KULKARNI (<i>Alternate</i>)
Unison Clamping Devices, Pune	SHRI P. K. SAWANT SHRI VIKRAM P. SAWANT (<i>Alternate</i>)
In Personal Capacity (199/1, 9th Cross, Cubbonpet Bengaluru)	SHRI MURTHY
In Personal Capacity (G-A/42 APHB Phase 3, Saidabad, Hyderabad)	SHRI K.V. SUBBA REDDY
BIS Directorate General	SHRI RAJIV RAJAN SINGH, SCIENTIST 'F'/ SENIOR DIRECTOR AND HEAD (PRODUCTION AND GENERAL ENGINEERING), [REPRESENTING DIRECTOR GENERAL (<i>Ex-officio</i>)]

Member Secretary
SHRI MONARCH JOSHI
SCIENTIST 'B'/ASSISTANT DIRECTOR
(PRODUCTION AND GENERAL ENGINEERING), BIS

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 2016* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Head (Publication & Sales), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the website- www.bis.gov.in or www.standardsbis.in.

This Indian Standard has been developed from Doc No.: PGD 37 (14811).

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002
Telephones: 2323 0131, 2323 3375, 2323 9402

Website: www.bis.gov.in

Regional Offices:

	Telephones
Central : 601/A, Konnectus Tower -1, 6 th Floor, DMRC Building, Bhavbhuti Marg, New Delhi 110002	{ 2323 7617
Eastern : 8 th Floor, Plot No 7/7 & 7/8, CP Block, Sector V, Salt Lake, Kolkata, West Bengal 700091	{ 2367 0012 2320 9474
Northern : Plot No. 4-A, Sector 27-B, Madhya Marg, Chandigarh 160019	{ 265 9930
Southern : C.I.T. Campus, IV Cross Road, Taramani, Chennai 600113	{ 2254 1442 2254 1216
Western : Plot No. E-9, Road No.-8, MIDC, Andheri (East), Mumbai 400093	{ 2821 8093

Branches : AHMEDABAD. BENGALURU. BHOPAL. BHUBANESHWAR. CHANDIGARH. CHENNAI. COIMBATORE. DEHRADUN. DELHI. FARIDABAD. GHAZIABAD. GUWAHATI. HIMACHAL PRADESH. HUBLI. HYDERABAD. JAIPUR. JAMMU & KASHMIR. JAMSHEDPUR. KOCHI. KOLKATA. LUCKNOW. MADURAI. MUMBAI. NAGPUR. NOIDA. PANIPAT. PATNA. PUNE. RAIPUR. RAJKOT. SURAT. VISAKHAPATNAM.